

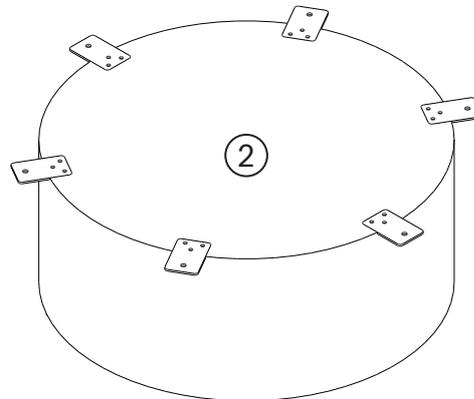


25076 ELEMENTS OUTDOOR COFFEE TABLE - CONCRETE - PEBBLE ASSEMBLY INSTRUCTIONS FOR COFFEE TABLE INSTALLATION

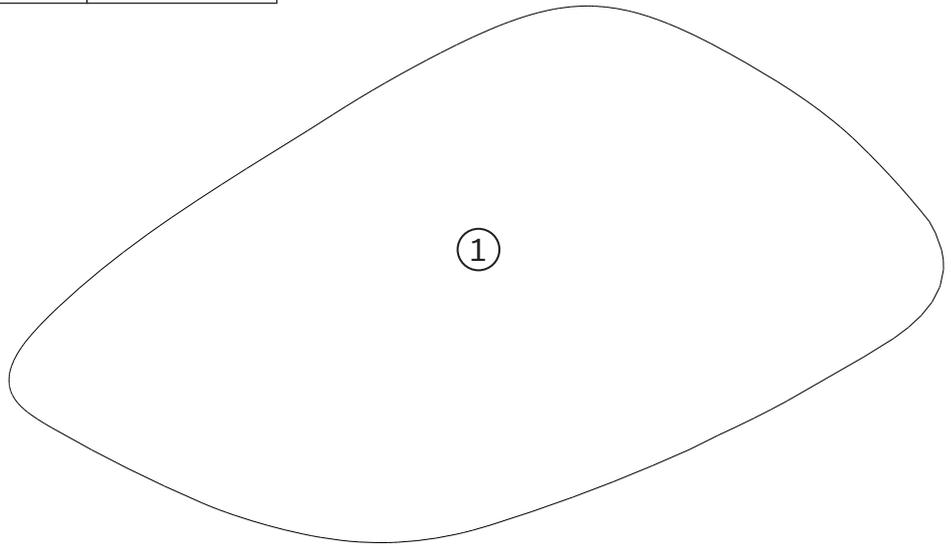

HARDWARE & TOOL ENCLOSED

 JCBC SCREW M6x20 (6pcs)	 WASHER M6x10 (6pcs)	 SPRING WASHER M6 (6pcs)	 ALLEN KEY
---	---	---	---

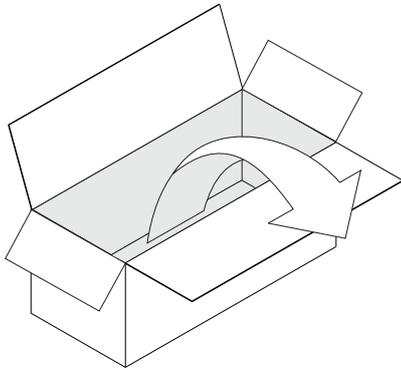

IN YOUR PACKAGE :

ASSEMBLY INSTRUCTIONS
HARDWARE (AS LISTED ABOVE)


PARTS TO BE INSTALLED

1. TABLE TOP (1 pc)
2. LEG (1 pc)

SYMBOLS




DIRECTION



NUMBER OF
PERSONS NEEDED






USE HAND





USE ALLEN KEY
TO TIGHTEN

NOTICE

<input checked="" type="checkbox"/> 	<input checked="" type="checkbox"/> 
<input checked="" type="checkbox"/> 	<input checked="" type="checkbox"/> 



A ATTACHING LEG TO TABLE TOP




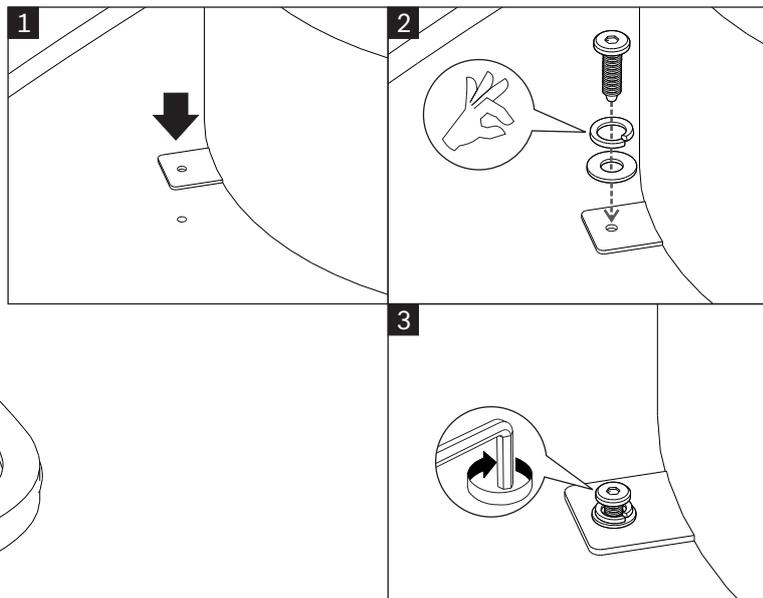
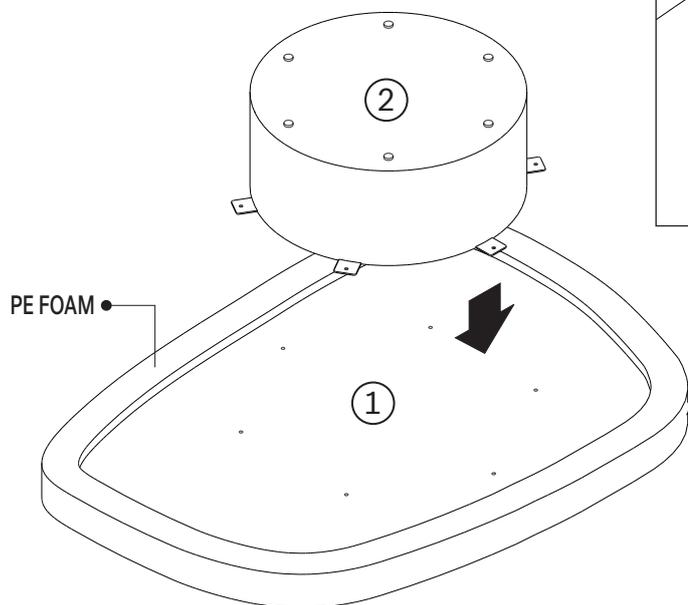


- USE JCBC SCREW M6x20 (6X)
- USE WASHER M6x10 (6X)
- USE SPRING WASHER M6 (6X)
- TIGHTEN FULLY



- TO PREVENT DAMAGE, REMOVE CONTENTS AND LAY OUT ON CARPET, THE PACKAGING CARTON OR OTHER PROTECTIVE SURFACE.
- KEEP PE FOAM IN PLACE DURING ASSEMBLY TO PROTECT EDGES FROM DAMAGE. IT CAN BE RECYCLED AFTERWARD.

B MODIFY THE ADJUSTABLE GLIDES

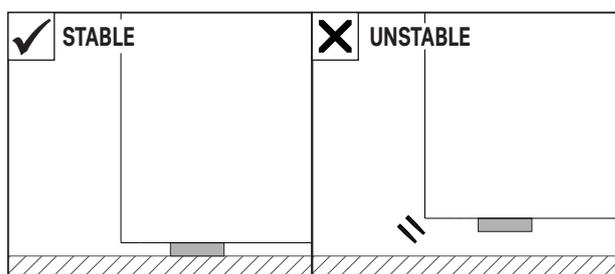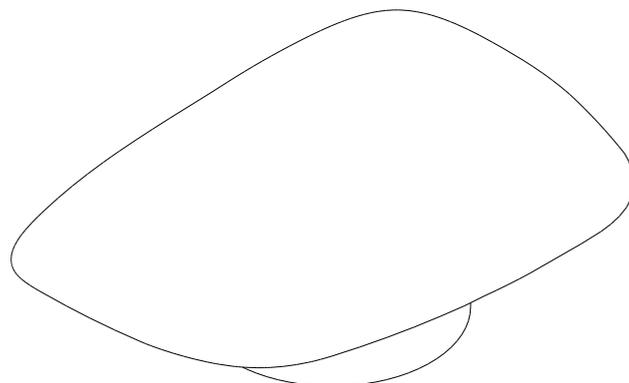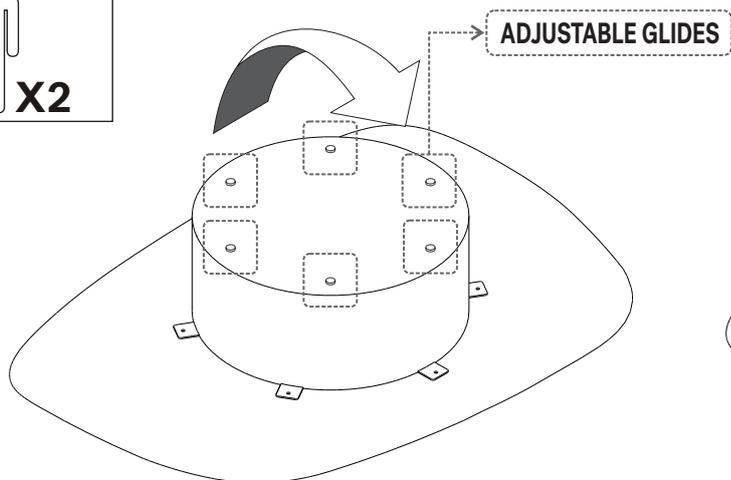

NOTE :
 TO ENSURE STABILITY, ALL GLIDES SHOULD BE ADJUSTED TO MAKE EVEN CONTACT WITH THE SURFACE UNDERFOOT.