


**FROST**  
DENMARK

## TOILET ROLL HOLDER 1909-5

DESIGNED BY BØNNELYCKE MDD

PRODUCT DETAILS AND  
MOUNTING INSTRUCTIONS FOR 3M

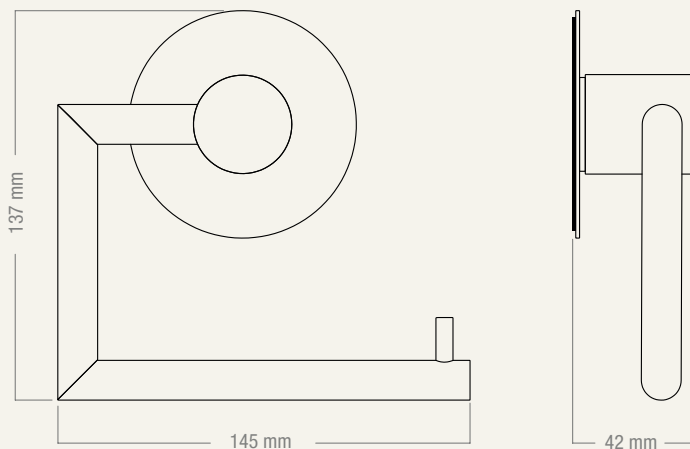

**MATERIAL: STAINLESS STEEL**

**AVAILABLE IN THE NINE FROST FINISHES:**



N1909-5  
BRUSHED  
STAINLESS



O1909-5  
POLISHED  
STAINLESS



N1909-5-BOC  
BRUSHED  
COPPER



N1909-5-C  
POLISHED  
COPPER



N1909-5-BMG  
BRUSHED  
GOLD



N1909-5-GO  
POLISHED  
GOLD



N1909-5-BCB  
BRUSHED  
BLACK



N1909-5-B  
MATT  
BLACK



N1909-5-W  
MATT  
WHITE

## BEFORE MOUNTING 3M PRODUCTS

---

3M tape is a high-quality, double-sided adhesive that provides strong and reliable adhesion. For the best results, choose smooth and glossy surfaces.

**Ideal surfaces:** Tiles, lacquered, or veneered board materials.

**Avoid:** Wallpaper, fabric, uneven or rough surfaces, moisture-resistant wallpaper, or grout lines on tiles, as these can reduce adhesion. Do not place 3M products under running water or in areas with constant water flow.

**NOTE:** To remove the 3M product, use a hairdryer on low to medium heat to warm the adhesive area for about 1–2 minutes. This helps soften the adhesive, making it easier to remove. After the product has been removed, we recommend applying new 3M tape to the backside for optimal adhesion.

## MOUNTING 3M PRODUCTS

---

- 1 Place the product in the desired position and mark the placement.

Use a level or similar tool if necessary to ensure a straight installation, which will help with even weight distribution.



- 2 Thoroughly clean the mounting surface with a cleaning wipe or similar product to remove dirt, grease, and other particles.

A clean surface ensures optimal adhesion and durability.



- 
- ③ Carefully remove the protective film from the 3M tape on the back of the product.



- ④ Position the item on the cleaned surface and press firmly for approximately 10 seconds, applying even pressure to secure the adhesive.



- ⑤ For optimal adhesion, allow the adhesive to cure for at least 42 hours before placing any weight on the product.

After 42 hours, your product is ready for use.

Weight capacity: Max. 2 kg



### **CLEANING AND MAINTENANCE**

Surfaces should be cleaned with a microfiber cloth, glass cleaner or other non abrasive and gentle agents.

### **ATTENTION:**

Never use solvents or aggressive household cleaners like bleach, acids (e.g. descalers) or ammonia-based bathroom cleaner to clean the product. Steel wool and hard brushes can permanently damage the surface of the steel.

### **EXCLUSION OF LIABILITY**

FROST accepts no liability whatsoever for damage to persons or property that occurs or has occurred as a result of improper installation or maintenance, particularly if the safety instructions and other points to note listed are not or have not been observed in full.

### **WARNING AND HAZARD NOTICES**

Improper mounting or use can lead to accidents and serious injuries.

**[www.frostdenmark.com](http://www.frostdenmark.com)**

Bavne Alle 32, 8370 Hadsten, Denmark

E-mail: [info@frost.dk](mailto:info@frost.dk) • Phone: (+45) 87 61 00 32

We are also to be found as frostdenmark on Facebook,  
Instagram, Pinterest and LinkedIn

