

# Daphne Cloe

design Tommaso Cimini, 2013

release 2019, December



Table standing lamp of metal with an articulated arm, adjustable in all positions and equipped with a plug connection. Flat base in metal with electronic transformer. 360° rotating head. The light source is a 9 W-LED controlled by an ON-OFF switch.

## Finishing

### Standard

● Black soft touch  
cod. 07L01ST00

○ Matt white  
cod. 07L02OP00

● Brushed nickel  
cod. 07L4400

### Special

● Matt red  
cod. 07L03OP00

● Matt yellow  
cod. 07L05OP00

● Metallic bronze  
cod. 07L29MT00

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 800 lm
- Emitted flux: 643 lm
- Efficacy: 64,3 lm/W
- CCT: 3000K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

## Electrical Facts



- Source power: 9W
- Power absorption: 10W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: table
- Net weight: 2,3 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging  
cardboard box  
58 x 28 x 13 (cm)  
0,02 m<sup>3</sup>

Gross weight  
3 Kg

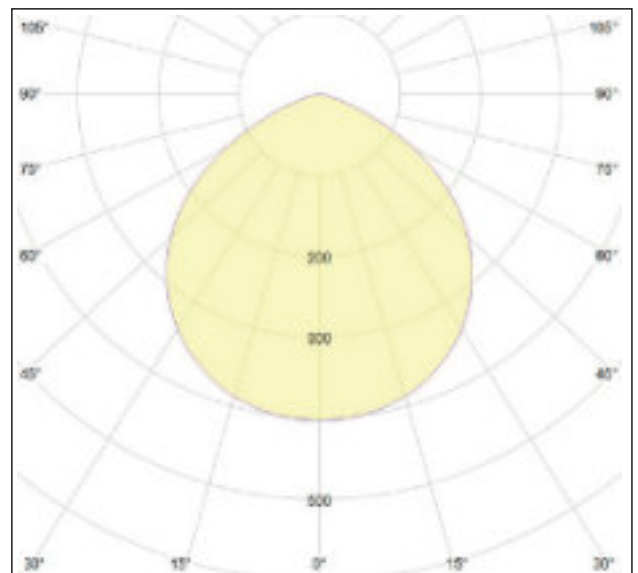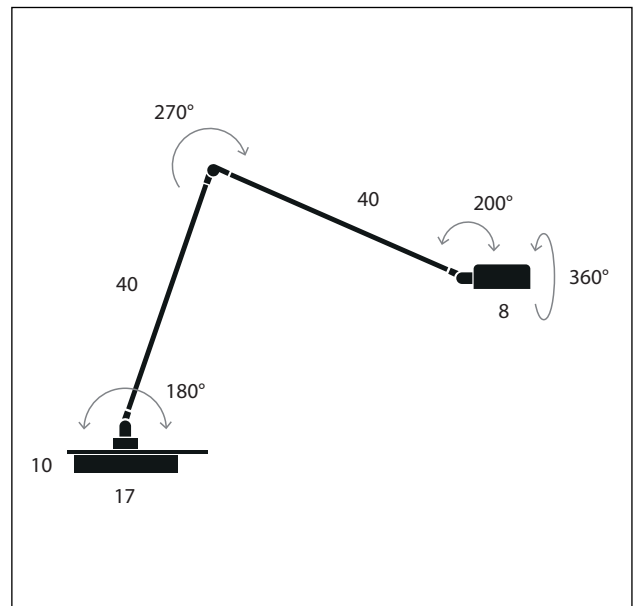

# Daphne Cloe

design Tommaso Cimini, 2013

release 2019, December



Table standing lamp of metal with an articulated arm, adjustable in all positions and equipped with a plug connection. Flat base in metal with electronic transformer. 360° rotating head. The light source is a 9 W-LED controlled by an ON-OFF switch.

## Finishing

### Standard

● Black soft touch  
cod. 07L01STK27

○ Matt white  
cod. 07L02OPK27

● Brushed nickel  
cod. 07L44K27

### Special

● Matt red  
cod. 07L03OPK27

● Matt yellow  
cod. 07L05OPK27

● Metallic bronze  
cod. 07L29MTK27

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 775 lm
- Emitted flux: 622 lm
- Efficacy: 62,2 lm/W
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

## Electrical Facts

- Source power: 9W
- Power absorption: 10W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: table
- Net weight: 2,3 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging  
cardboard box  
58 x 28 x 13 (cm)  
0,02 m<sup>3</sup>

Gross weight  
3 Kg

